


# Portland Cladding

Last Revised 2/21/2019 - A&D

## PRODUCT DESCRIPTION

Portland Cladding is made of Douglas fir and Hemlock reclaimed from solid and glue laminated beams and lumber. These are taken from deconstructed industrial, agricultural, and residential buildings in the Pacific Northwest. Designed with tongue and groove edges for easy installation with standard tools and techniques.

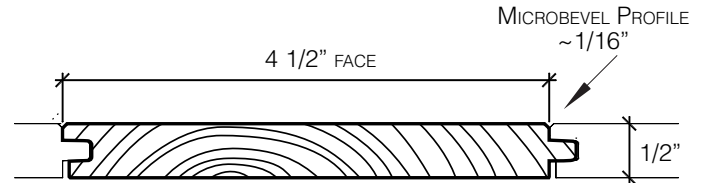

## SPECIFICATIONS

### DIMENSIONS

- 1/2" thick x 4 1/2" face x 2' to 8' random lengths

### MATERIAL AND SURFACE

- Reclaimed Douglas fir and Hemlock
- Janka hardness scale 540 - 710
- Sanded smooth face (textured face available)
- Tongue and groove edges with microbevel
- Standard reclaimed marks (nail holes, ferrous staining, glue lines, and occasional bolt holes) will be apparent
- Voids, checked knots, and small cracks between 1/8" - 1/2" can be expected.

### FINISHES, ADHESIVES AND FILLERS

- Standard Top Coat/Sheen: Semi-Gloss 104 WB Finish
- Clear/Top Coat VOC: 213 g/l
- Anthracite, Cascadian Brown, Chestnut, Ebony, Leather, Umber, Warm Brown Stain VOC: 7 g/l

### WINDFALL LUMBER FSC CHAIN OF CUSTODY

- SA-COC-002372-3

### POTENTIAL LEED CREDITS

- Materials & Res. Credit 3: Materials Reuse
- Materials & Res. Credit 4: Recycled Content
- Materials & Res. Credit 5: Regional Materials (500 mi of Tumwater, WA)
- Materials & Res. Credit 7: Certified Wood
- Indoor Environmental Quality Credit 4.1: Low-emitting Materials – Adhesives
- Indoor Environmental Quality Credit 4.2: Low-emitting Materials – Paints & Coatings



Portland Cladding - Clear



windfall




The mark of  
responsible forestry  
FSC® C041262

# Textured Portland Cladding

Last Revised 2/21/2019 - A&D

## PRODUCT DESCRIPTION

Textured Portland Cladding is made of Douglas fir and Hemlock reclaimed from solid and glue laminated beams and lumber. These are taken from deconstructed industrial, agricultural, and residential buildings in the Pacific Northwest. Designed with tongue and groove edges for easy installation with standard tools and techniques.

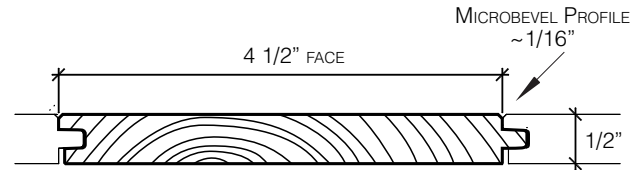

## SPECIFICATIONS

### DIMENSIONS

- 1/2" thick x 4 1/2" face x 2' to 8' random lengths

### MATERIAL AND SURFACE

- Reclaimed Douglas fir and Hemlock
- Janka hardness scale 540 - 710
- Textured face (smooth face available)
- Tongue and groove edges with microbevel
- Standard reclaimed marks (nail holes, ferrous staining, glue lines, and occasional bolt holes) will be apparent
- Voids, checked knots, and small cracks between 1/8" - 1/2" can be expected.

### FINISHES, ADHESIVES AND FILLERS

- Standard Top Coat/Sheen: Satin 105 WB Finish
- Clear/Top Coat VOC: 213 g/l
- Anthracite, Cascadian Brown, Chestnut, Ebony, Leather, Umber, Warm Brown Stain VOC: 7 g/l

### WINDFALL LUMBER FSC CHAIN OF CUSTODY


- SA-COC-002372-3

### POTENTIAL LEED CREDITS

- Materials & Res. Credit 3: Materials Reuse
- Materials & Res. Credit 4: Recycled Content
- Materials & Res. Credit 5: Regional Materials (500 mi of Tumwater, WA)
- Materials & Res. Credit 7: Certified Wood
- Indoor Environmental Quality Credit 4.1: Low-emitting Materials – Adhesives
- Indoor Environmental Quality Credit 4.2: Low-emitting Materials – Paints & Coatings



Textured Portland Cladding - Ebony

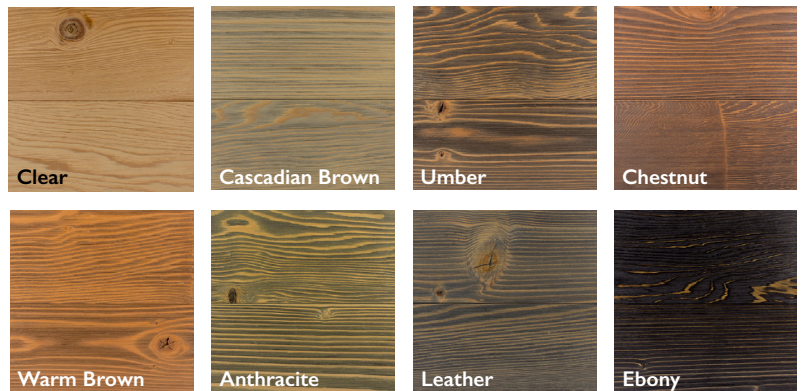

windfall



The mark of  
responsible forestry  
FSC® C041262