


# Cascades Cladding

Last Revised 2/21/2019 - A&D

## PRODUCT DESCRIPTION

Named for the nearby Cascades mountain range and made from the Pacific Northwest's regional Red Alder, Cascades Cladding is comprised of three thicknesses in a tongue and groove profile. With rounded edges and a silky smooth face, the cladding is available in 10 translucent colors which allow the natural features to shine through. Stains offered are low to no-VOCs and a dead flat and satin top coat, which enlivens the wood. Designed with tongue and groove edges for easy installation with standard tools and techniques.

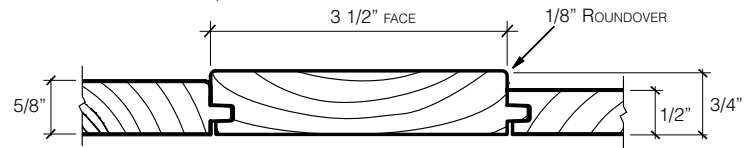

## SPECIFICATIONS

### DIMENSIONS

- 7/16", 5/8" and 3/4" thick x 3-1/2" wide x 2'-6' random lengths
- 1/8" roundover on 3/4" and 5/8", straight edge on 1/2"

### MATERIAL AND SURFACE

- Red Alder (FSC Mix Credit)
- Janka hardness scale 590
- Sanded smooth face and edges
- Tongue and groove profile with eased edges and ends
- Open knots allowed up to 3/8" and not filled

### FINISHES

- Standard Top Coat/Sheen: Dead Flat 107 WB Finish
- Clear/Top Coat VOC: 213 g/l
- Waterborne stain: Bone and Dove VOC: 7 g/l
- Waterbased stain: Citrine, Monarch, Earthen, Sage, Slate, Auburn, Espresso, and Raven VOC: 0 g/l

### WINDFALL LUMBER FSC CHAIN OF CUSTODY


- SA-COC-002372-3

### POTENTIAL LEED CREDITS

- Materials & Resources Credit 5: Regional Materials (500 mi of Tumwater, WA)
- Materials & Resources Credit 7: Certified Wood
- Indoor Environmental Quality Credit 4.2: Low-emitting Materials – Paints & Coatings



Cascades Cladding - Dove

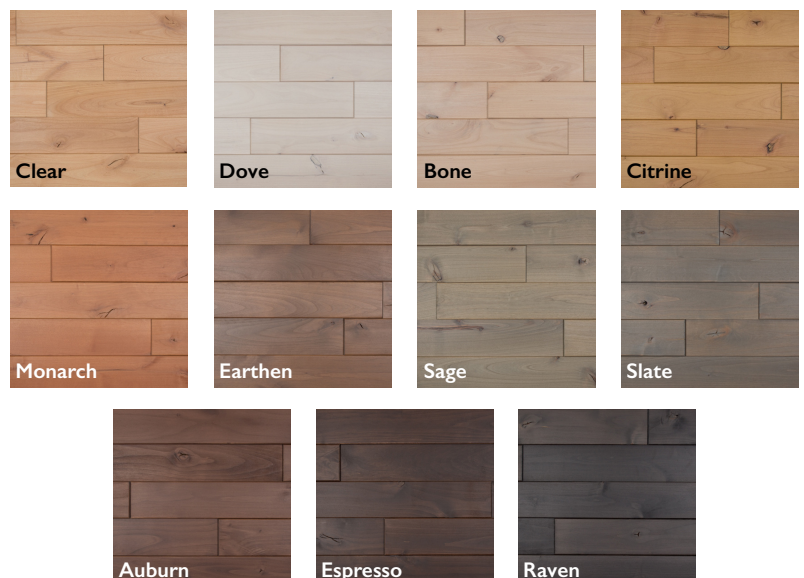

windfall



The mark of  
responsible forestry  
FSC® C041262